





森霸传感科技
SENBA SENSING TEC.

U@U) °)

森霸传感科技股份有限公司

o o u # O



CE

	† \ O †	@ O				°
						7
		u 7 k	7 # O M			
		# O	7 # O M			
		O			k °	
		=				
		k °	7			
						†
°) #						#
						# M
°) #						#
† M						#
			7 # O M	h @		=
= h 7			7 # O M	h @		=
		7 \ o #				=
		7 # O M		7 \ o #		

S22-P340R

PI R

ADC

8 a

m ~

1 MIX

ADC 4


PI R m ~ 8 a 4

R 4

24 B m (BAND GAP Voltage Ref)

« C

M




16ms

64us (tcl)

" 0"


6

3. 7. 4 DDCI

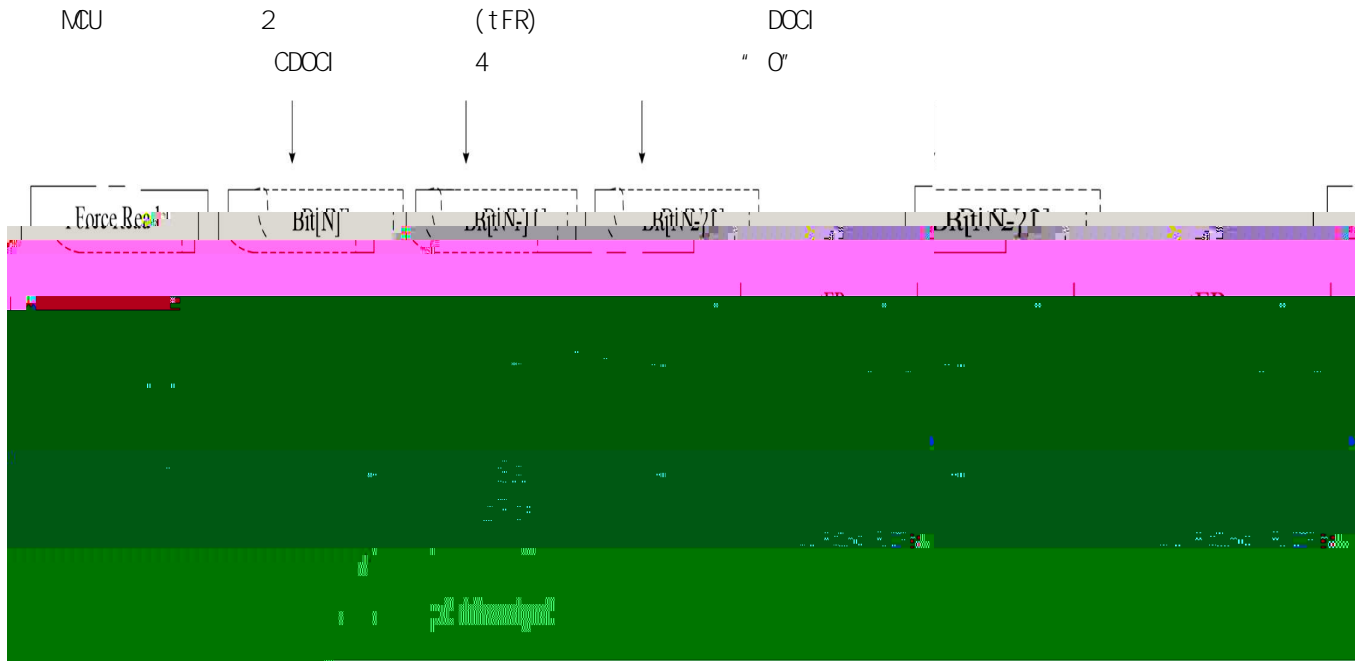

C ADC N DDCI / INTR ADC 512

PI R P f X R

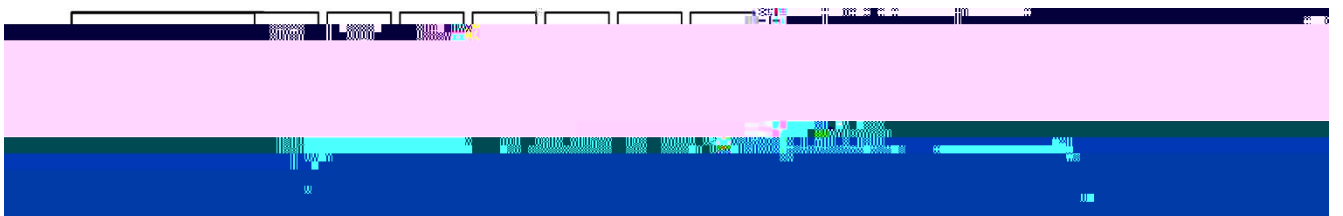

C

[6: 5]

[1: 0] ADC

0 = PI R (HPF) 1 = PI R (LPF)

2 = 3 =

[4: 1]

[0]

[m m 1=

Z™ 0 mP" Pmy'fp 5 vospA% nB/ " P.P. 87h.p

Qō

TM

